
STRYN



FLOORING



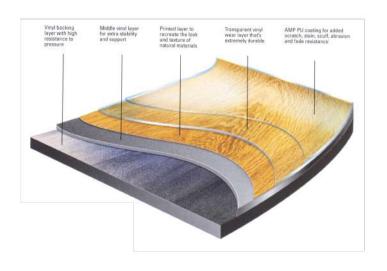

STRYNSPECIFICATIONS

Loose Lay

Wear Layer: 22mil (0.55mm)

• Overall Thickness: 5.0 mm

 Size, Gladwood and Granby: 9" x 48" (228 mm x 1219 mm)

• Size, Béton: 39.37" x 39.37" (1000 mm x 1000 mm)

• 100% Phthalate Free

Reach Compliant


 Warranty: 20-Year Commercial and Lifetime Residential

• Woods: 6 Pieces (18 sq. ft.)

Stones: 2 Pieces (21.53 sq. ft.)

STRYN+SPECIFICATIONS

- Overall Thickness: 5.5 mm
- IXPE Acoustical Backing (Sound Rating: STC 53, IIC 55 and Δ IIC 20 with 6" slab concrete assembly with no ceiling)
- Warranty: 15-Year Commercial and Lifetime Residential
- 6 Pieces (18 sq. ft.)

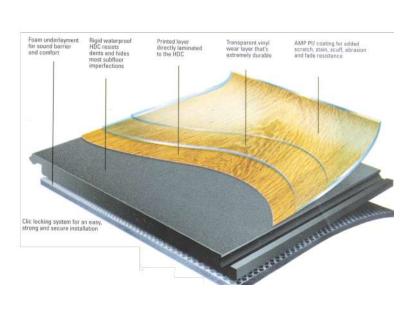

EIR EMBOSSING

The CHARLOTTE Granby and Groth palettes have EIR embssing which stands for Embossed in Register.

EIR is a manufacturing method that creates a grain appearance consistent with the look of a real hardwood grain. This process aligns the embossing on the sheet with the printed wood grain design and intensifies the visual impact of the depth. texture and appearance of the floor while still providing durability and ease of maintenance.



- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

SPECIFICATIONS:	
SOLID VINYL TIDE:	CLASS III, TYPE B
RESIDUAL INDENTATION:	PASSES, <10%
FLEXIBILITY:	PASSES, 25.4MM MANDREL
DIMENSIONAL STABILITY:	PASSES, <0.020 IN. PER LIN. FT.
CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
HEAT COLOR STABILITY:	PASSES, < Δ8E
LIGHT COLOR STABILITY:	PASSES, < Δ8E
STATIC LOAD LIMIT:	PASSES, 250 LBS.
MODIFIED FOR MAX WEIGHT:	1,200 LBS.
CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
SMOKE DENSITY:	PASSES, <450
SLIP RESISTANCE:	>0.6 (DRY)





GLADWOOD OAK SUMMIT GOSOO1L



GRANBY OAK SNOW GOSNOO1L



GLADWOOD OAK PANHANDLE GOP006L



GRANBY OAK PEANUT GOPE008L



GLADWOOD OAK CANYON GOCOO2L




GLADWOOD OAK TIMBER GOTOO5L



GRANBY OAK CARAFE GOC007L



STRYN IRON SI002L

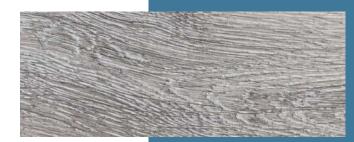


GRANBY OAK MIST GOM002L



STRYN HARBOR SH004L



STRYN STEEL SS003L



STRYN PEARL SP001L



