

ASHVILLE



HELM


FLOORING

HELM

FLOORING


HDC SPECIFICATIONS

- Wear Layer: 8mil (0.2mm)
- Overall Thickness: 4.2 mm
- Size 5.75" x 47.75"
- 100% Phthalate Free
- IXPE Acoustical Backing
- Reach Compliant
- Warranty: 12-Year Residential
- 20 Pieces (36 sq. ft.)

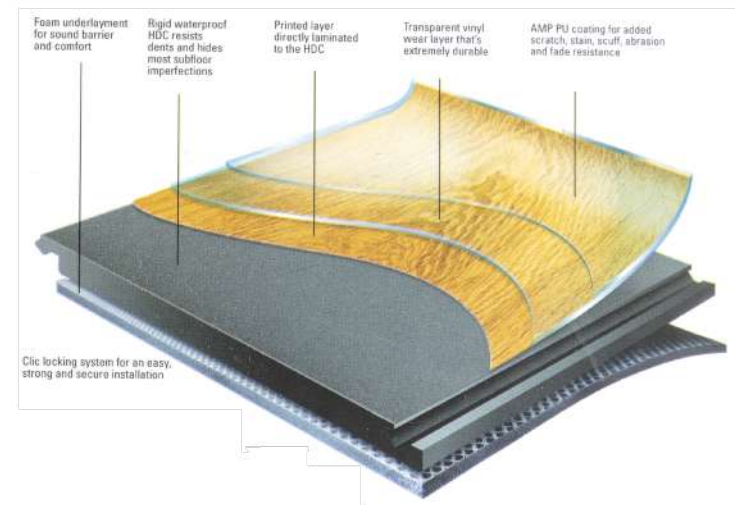

GLUE DOWN SPECIFICATIONS

- Wear Layer: 8mil (0.2mm)
- Overall Thickness: 2.0 mm
- Size 6" x 48"
- 100% Phthalate Free
- Reach Compliant
- Warranty: 10-Year Residential and 3-Year Light Commercial
- 12 Planks (22.88 sq. ft.)

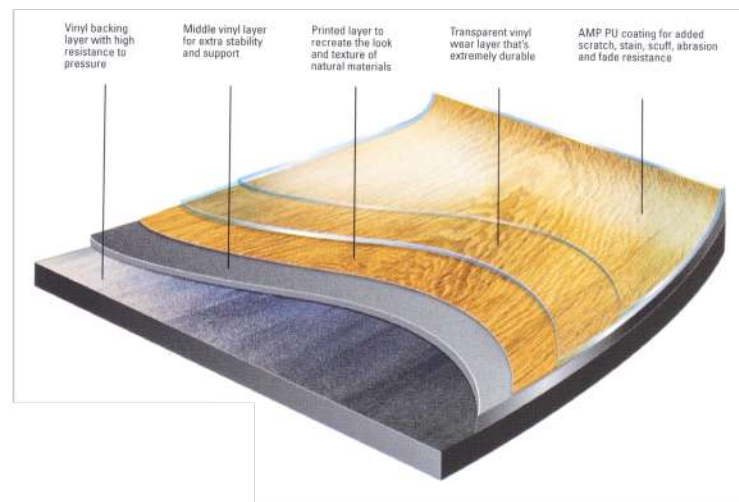

HDC 4.2 mm / GLUE DOWN 2.0 mm



CARRIER OAK TIN

COT2004



CASSELBERRY AOK SMOKE

CAS2003



CASSELBERRY AOK GRAY

CAS2003



CARVER WALNUT SHADOW

CWS2002



CARTER WALNUT THUNDER

CWT2002



CAPE WALNUT CHOCOLATE

CWC2001



CARRAWAY OAK CORDUROY

COC2002



CARDINAL OAK SUEDE

COS2003



CARLTON OAK HAZEL

COH2006




CARJEN OAK TAUPE

COT2002

SPECIFICATIONS:

SOLID VINYL FLOORTILE:	CLASS III, TYPE B (GLUE DOWN); CLASS 1, TYPE B (HDC)
STATIC COF FOR POLISHED SURFACES:	EXCEEDS INDUSTRY STANDARDS
STATIC LOAD LIMIT:	PASSES
CRITICAL RADIANT FLUX:	CLASS 1
SMOKE DENSITY:	PASSES
STAIN & CHEMICAL RESISTANCE:	EXCELLENT

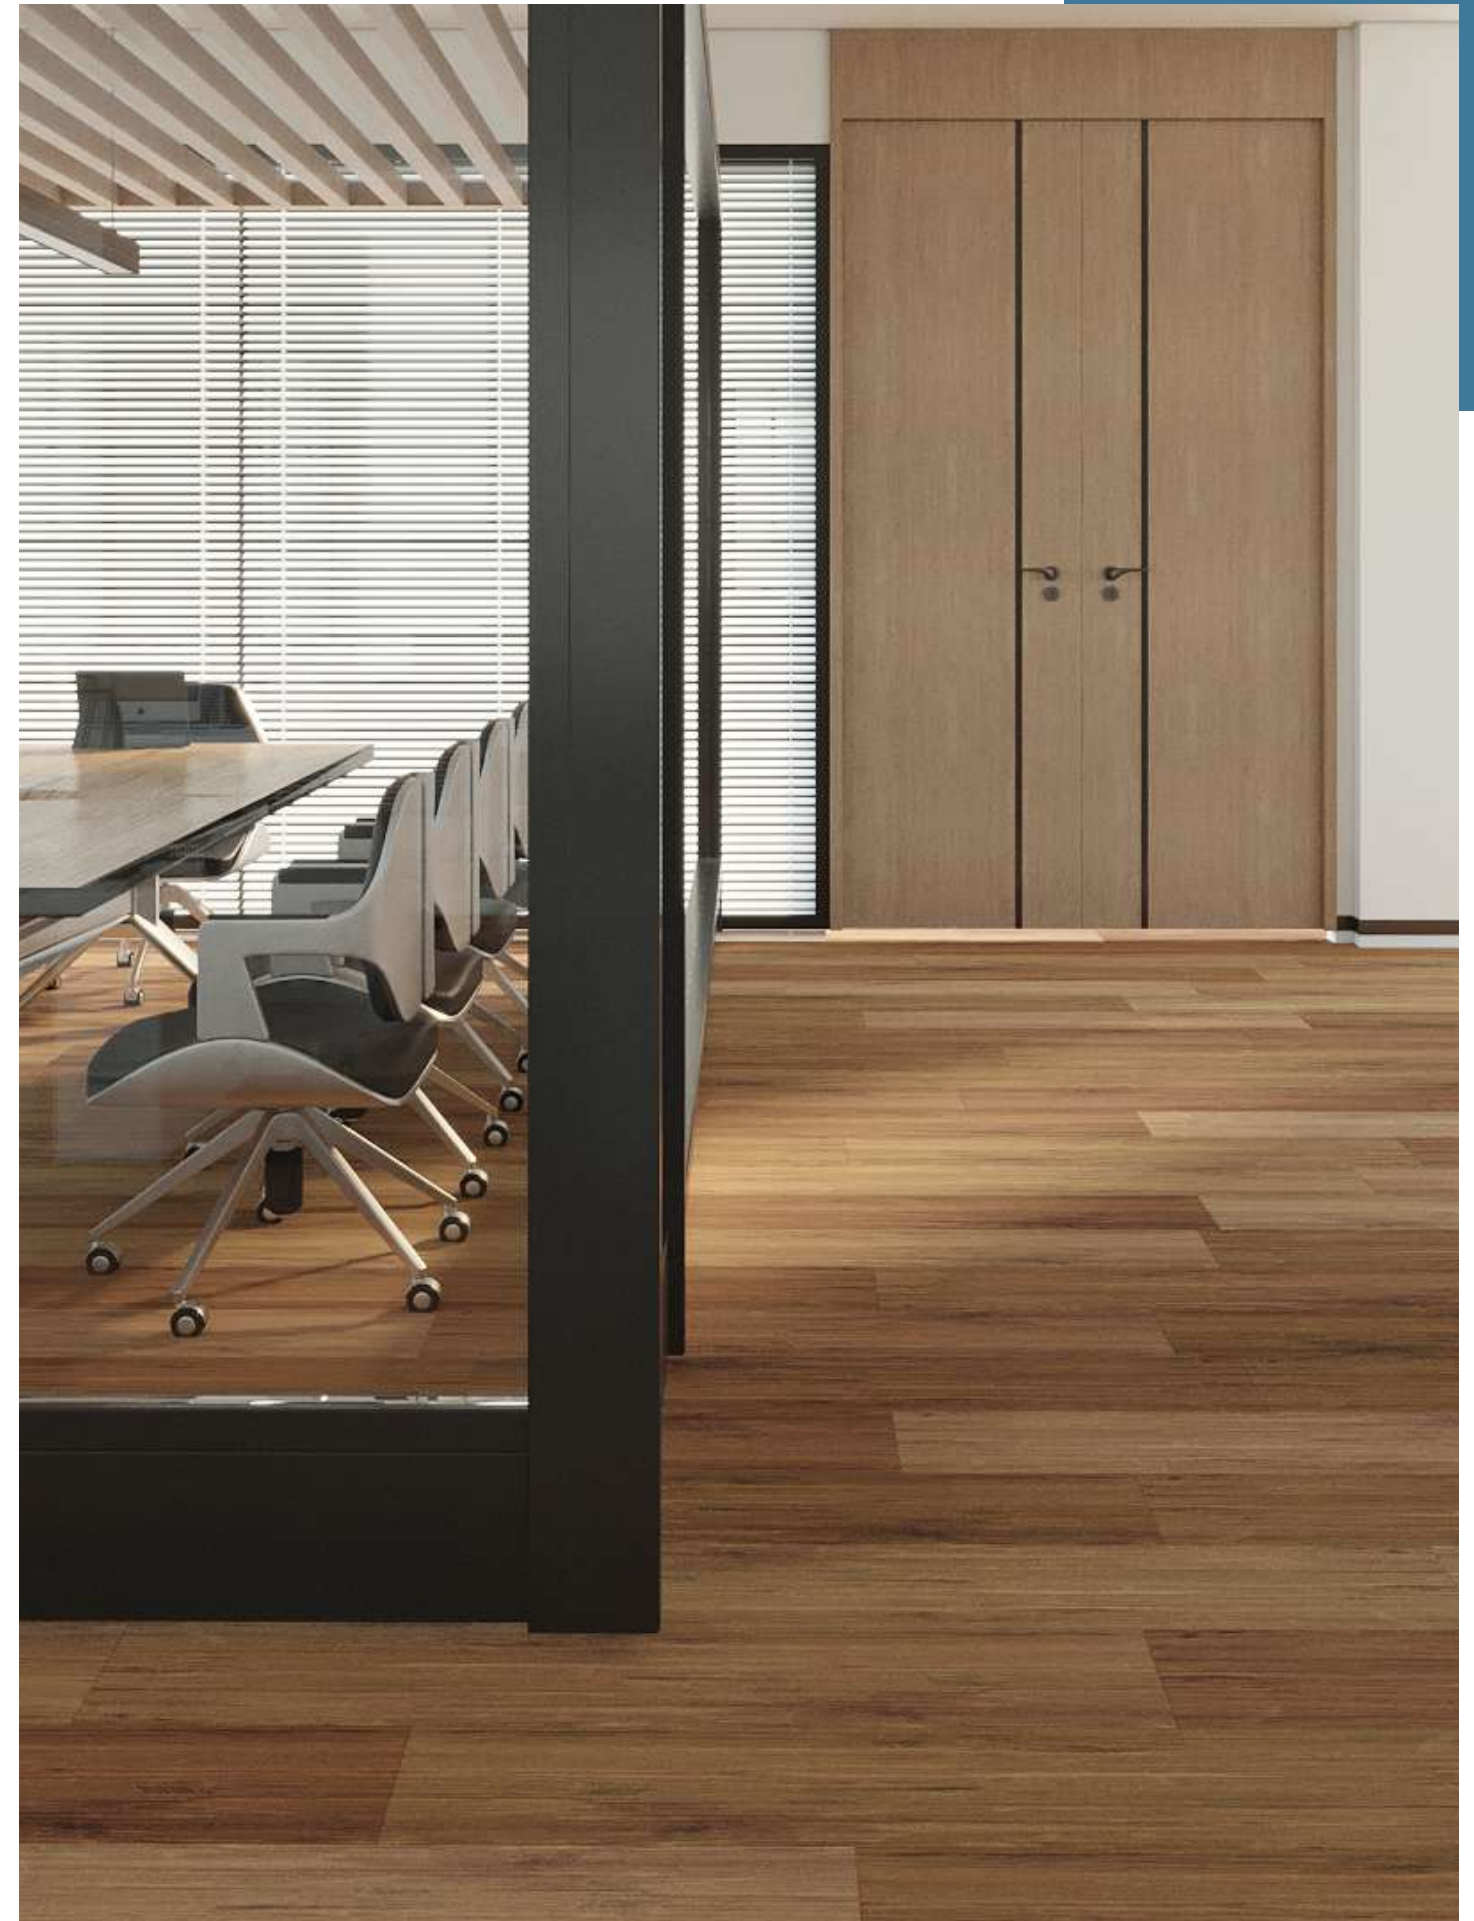

HELM

FLOORING