

BERGEN




HELM

FLOORING


HELM

FLOORING

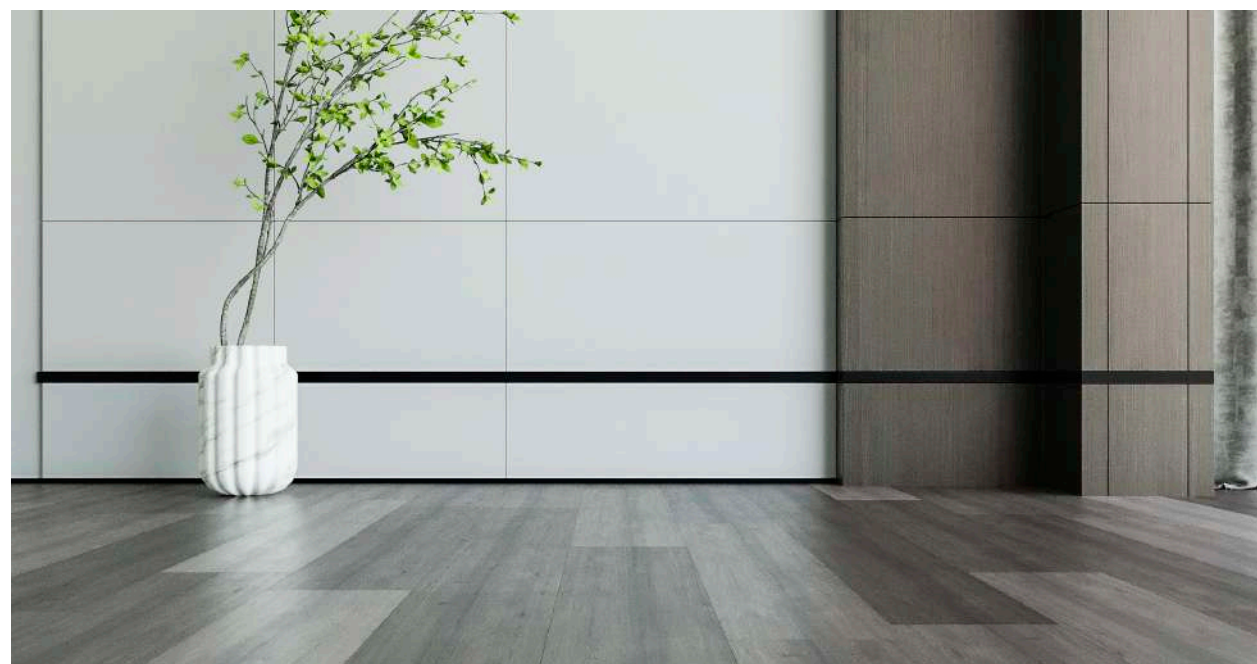

BERGEN SPECIFICATIONS

- MADE IN USA
- HDC Clic
- Thickness/Wear Layer:
5.2 mm 22mil (.55)
5.0 mm 12mil (.30)
- Size: 5.75" x 47.75"
(146 mm x 1212 mm)
- Microbevel Edge
- Waterproof
- 100% Phthalate Free
- Warranty: 15-Year Commercial (22mil), 10-Year Commercial (12mil) & Lifetime Residential

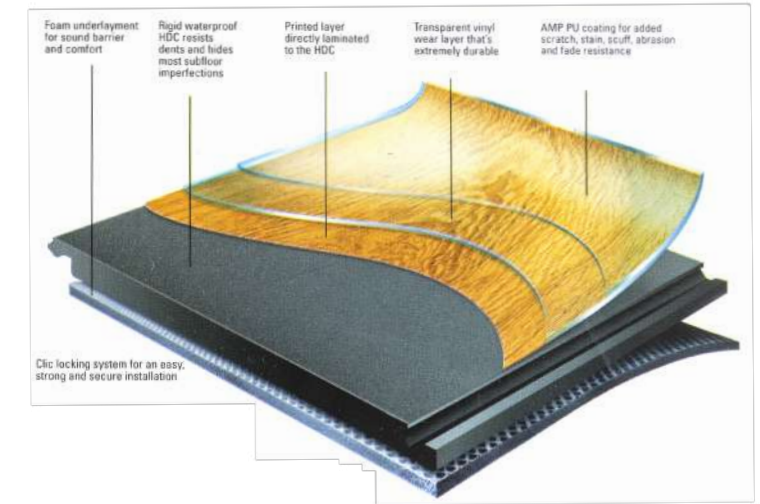

- Patented Coating
- 30% More Scratch Resistance Over Typical Coatings
- Exceptional Wear Resistance and High Strength
- Low-gloss finish

SPECIFICATIONS:

RIGID POLYMERIC CORE FLOORING:	CLASS I, TYPE B, GRADE 1, BACKING CLASS B
RESIDUAL INDENTATION:	PASSES, <0.007 IN.
SURFACE INTEGRITY:	PASSES, NO PUNCTURE
DIMENSIONAL STABILITY:	PASSES <0.2% / LIN. FT.
CURLING:	PASSES, <0.08 IN.
CHEMICAL RESISTANCE:	PASSES (ASK FOR CHART)
HEAT COLOR STABILITY:	PASSES, < Δ8E
LIGHT COLOR STABILITY:	PASSES, < Δ8E
STATIC LOAD LIMIT:	PASSES, 250 LBS.
CRITICAL RADIANT FLUX:	CLASS I, >0.45 W/CM ²
SMOKE DENSITY:	PASSES, <450
SLIP RESISTANCE:	>0.6 (DRY)




MABLE OAK KHAKE

12 mil: MAOK5S-503U / 22 MIL: MAOK5S-5255U



MARCELLA OAK SNOW

12 mil: MAOS1S-503U / 22 MIL: MAOS1S-5255U

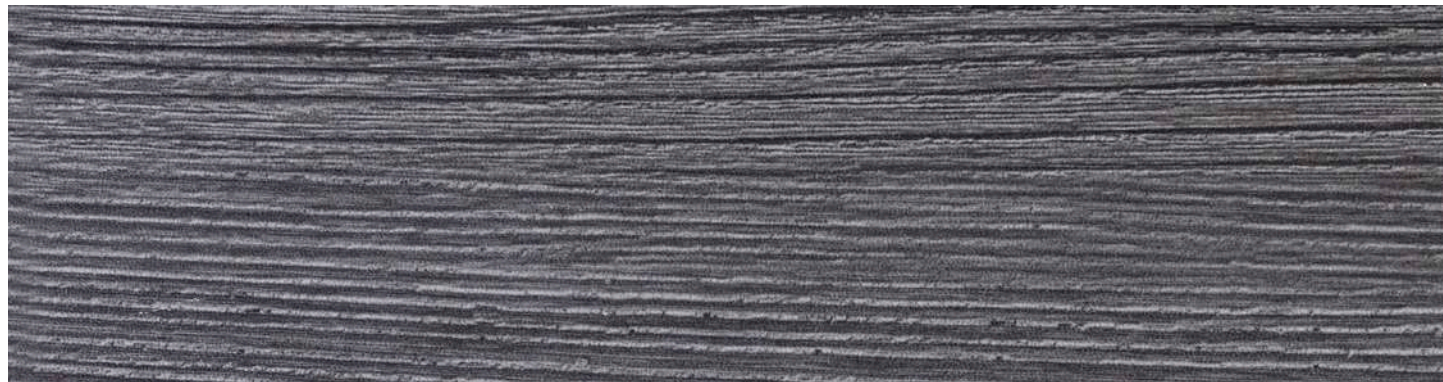

MACON OAK ANCHOR

12 mil: MAOA9S-503U / 22 MIL: MAOA9S-5255U



MASSEY OAK MIST

12 mil: MAOM2S-503U / 22 MIL: MAOM2S-5255U



MOUNT OAK SUEDE

12 mil: MOS3S-503U / 22 MIL: MOS3S-5255U



MOSELEY OAK TAUPE

12 mil: MOOT2S-503U / 22 MIL: MOOT2S-5255U



Acoustical Backing



MORRIS OAK PEANUT

12 mil: MOOP9S-503U / 22 MIL: MOOP9S-5255U



HELM

FLOORING